




Industrial Frigo

The original Frigo

DIF 800

Fluido= Aria Fluid= Air Fluide= Air Flüssigkeit= Luft Fluido= Aire	Portata d'aria Air flow rate Débit d'air Luftdurchsatz Caudal de aire	Temperatura aria ingresso Inlet air temperature Température aire entrée Lufteintrittstemperatur Temperatura aire entrada	Umidità relativa Relative humidity Humidité relative Relative Luftfeuchte Humedad relativa	Dew point in uscita Outlet dew point Point de rosée sortie Ausgangstaupunkt Punto de rocío salida	Prevalenza disponibile Available pressure Pression disponible Verfügbaren druck Altura disponible
	m³/h	°C	%	°C	Pa
	800	35	50	-15	300

Potenza ventilatori Fans power Puissance ventilateurs Ventilatoren Leistung Potencia ventiladores	Resistenze Heaters Resistance Widerstand Resistencia	Temperatura acqua Water temperature Température de l'eau Wassertemperatur Temperatura agua	Rumorosità Noise Bruit dB(A) Geräusch Ruido	Peso a vuoto Net weight Poids net Leergewicht Peso en vacío
n° kW ass./inst.	n° kW	°C	1m 10m	kg
1x 0,7/0,8	2x 3,3	8	79 59	253

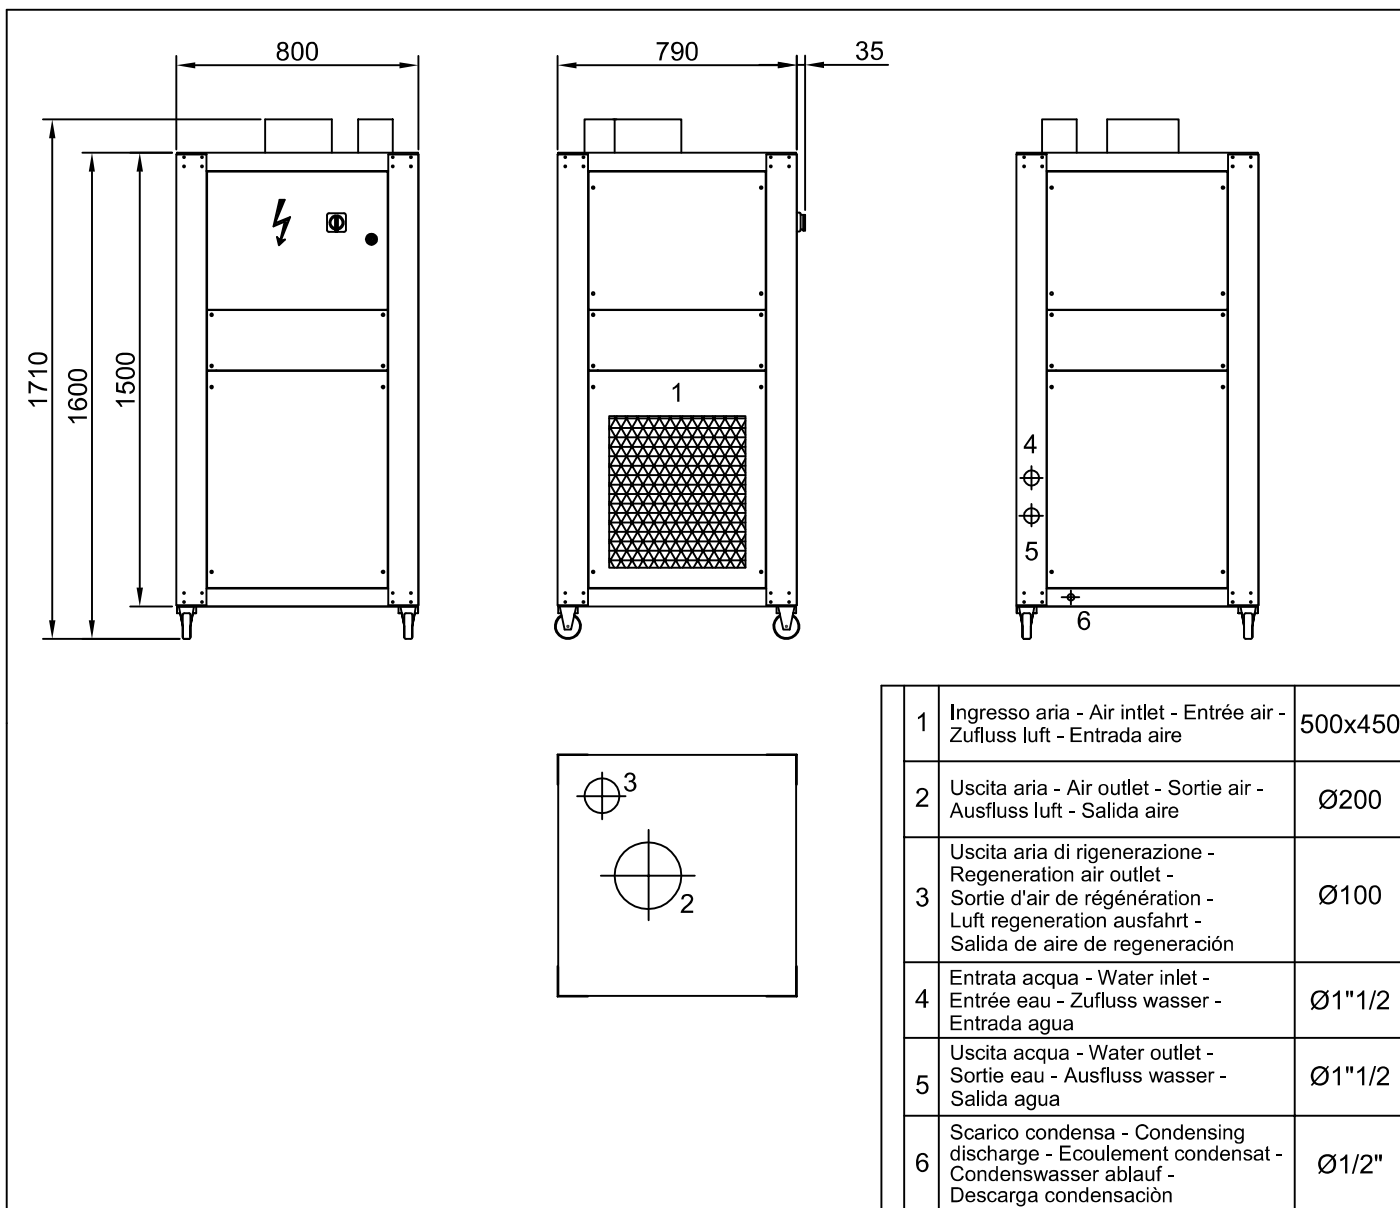

Potenza elettrica totale Total electric power Puissance électrique tot. Gesamtstromstärke Potencia eléctrica total	ass.	7,4 kW
	inst.	7,5 kW

Corrente Max Max. Current Courant max. Max. Spannung Corriente máx.	A
	11,5

Magnetotermico Magnetothermic Switch Interr. Magnétothermique Magnetothermis. Schalter Interr. Magnetotérmico	A
	16

INDUSTRIAL FRIGO SI RISERVA IL DIRITTO DI MODIFICARE I DATI DELLA PRESENTE SCHEDA TECNICA IN QUALUNQUE MOMENTO.
INDUSTRIAL FRIGO RESERVES THE RIGHT TO MODIFY THE DATA OF THIS TECHNICAL CARD IN ANY TIME, WITHOUT PRIOR NOTICE.
INDUSTRIAL FRIGO SE RÉSERVE LE DROIT DE MODIFIER LE DONNÉES DE CETTE FICHE TECHNIQUE SANS PRÉAVIS.
INDUSTRIAL FRIGO BEHÄLT SICH DAS RECHT VOR, DIE VORLIEGENDE DATEN OHNE VORHERIGE BENACHRICHTIGUNG ZU ÄNDERN
INDUSTRIAL FRIGO SE RESERVA EL DERECHO DE MODIFICAR LOS DATOS DE ESTA FICHA TECNICA UN CUALQUIER MOMENTO.

380/400/415V - 3 - 50Hz

06.07.20 P810000.03